


AUSSENGEWINDE EXTERNAL THREADS

SPANNSCHLOSS MIT GEWINDE, VERPRESST TURNBUCKLE, WITH THREAD SWAGED

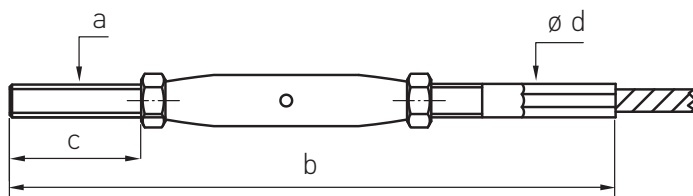

| Artikelnummer Part number | a | b | c | ø d | ø Seil ø rope | Spannweg Adjustment | kN |
|------------------------------|-----|-----|----|-----|------------------|------------------------|------|
| 110-0200 | M5 | 205 | 60 | 5 | 2 | +30 -40 | 2,8 |
| 110-0300 | M6 | 205 | 60 | 6 | 3 | +30 -40 | 6,3 |
| 110-0400 | M6 | 231 | 60 | 7 | 4 | +30 -40 | 11,2 |
| 110-0401 | M8 | 247 | 60 | 8 | 4 | +40 -50 | 11,2 |
| 110-0500 | M8 | 273 | 60 | 8 | 5 | +40 -50 | 17,5 |
| 110-0600 | M10 | 300 | 70 | 10 | 6 | +40 -60 | 25,2 |
| 110-0800 | M12 | 360 | 70 | 13 | 8 | +40 -90 | 49,4 |
| 110-1000 | M16 | 435 | 70 | 18 | 10 | +60 -90 | 61,7 |
| 110-1200 | M20 | 495 | 70 | 20 | 12 | +60 -120 | 83,2 |
| 110-1600 | M24 | 658 | 70 | 27 | 16 | +70 -208 | 140 |

Werkstoff 1.4401 | kN = Bruchkraft
Material AISI 316 | kN = breaking load

Alle Angaben in Millimetern
All dimensions in millimeters