


AUSSENGEWINDE EXTERNAL THREADS

SPANNSCHLOSS, VERSCHRAUBT TURNBUCKLE, SWAGELESS

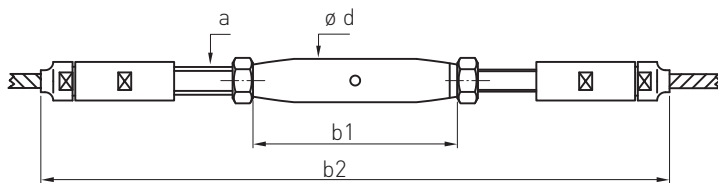

Artikelnummer Part number	a	b1	b2	ø d	ø Seil ø rope	Spannweg Adjustment	kN
825-0400-02	M6	92	261	10	4*	+25 -25	8
825-0500-02	M8	112	286	14	5*	+45 -45	12,6
825-0600-02	M8	112	286	14	6*	+45 -45	18
825-0800-02	M10	120	374	18	8	+60 -60	32
825-1000-02	M14	150	496	21	10	+70 -70	46
825-1200-02	M16	190	584	27	12	+80 -80	67

Werkstoff 1.4404 | *Nicht geeignet für Spiralseile 1x19 | Außengewinde links/rechts, verschraubt, sind je halb im Spannröhre eingeschraubt. Die minimale Einschraubtiefe beträgt 1,5 x Gewinde-ø (M8 = 12 mm) | kN = Bruchkraft

Material AISI 316L | *Not suitable for strand 1 x 19 | Left/right swaged external threads are screwed half way into the turnbuckle. The minimum screw-in depth is 1.5 x thread ø (M8 = 12 mm) | kN = breaking load

Alle Angaben in Millimetern
All dimensions in millimeters