


# AUSSENGEWINDE EXTERNAL THREADS

## SPANNSCHLOSS, F30 GEHÄMMERT TURNBUCKLE THREADS, F30 HAMMERED

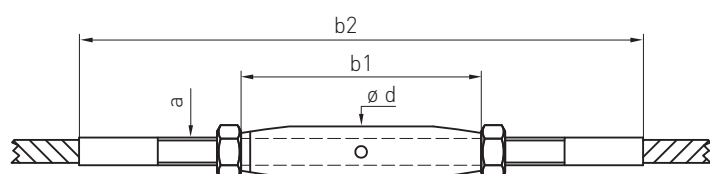

Artikelnummer Part number	a	b1	b2	ø d	ø Seil ø rope	Spannweg Adjustment	kN
828-0400-02	M5	80	160	8	4	+38   -42	7,1
828-0500-02	M6	92	178	10	5	+32   -40	11,2
828-0600-02	M8	112	214	13,5	6	+36   -47	16
828-0800-02	M10	120	236	17,2	8	+30   -44	25
828-1000-02	M12	150	280	21,3	10	+24   -40	41,6

**Werkstoff 1.4404 | Außengewinde links/rechts, verpresst, sind je halb im Spannrohr eingeschraubt.**  
**Die minimale Einschraubtiefe beträgt 1,5 x Gewinde-ø (M8 = 12 mm) | Nicht geeignet für Spiralseile 1x19 | kN = Bruchkraft**  
 Material AISI 316L | Left/right swaged external threads are screwed half way into the turnbuckle.  
 The minimum screw-in depth is 1.5 x thread ø (M8 = 12 mm) | Not suitable for strand 1x19 | kN = breaking load

**Alle Angaben in Millimetern**  
 All dimensions in millimeters