




AUSSENGEWINDE EXTERNAL THREADS

AUSSENGEWINDE, VERPRESST_EXTERNAL THREAD, SWAGED

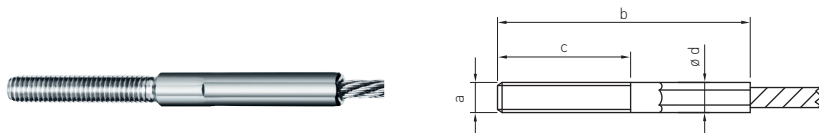

Artikelnummer Rechtsgewinde Part number RH thread	Artikelnummer Linksgewinde Part number LH thread	a	b	c	ø d	ø Seil ø rope	kN
850-0100-020	855-0100-020	M4	35	20	4	1	0,5
850-0200-030	855-0200-030	M5	55	30	5	2	2,8
850-0200-060	855-0200-060	M5	85	60	5	2	2,8
850-0300-030	855-0300-030	M6	70	30	6	3	6,3
850-0300-060	855-0300-060	M6	100	60	6	3	6,3
850-0400-030 	855-0400-030	M6	75	30	7	4	11,2
850-0400-060 	855-0400-060	M6	105	60	7	4	11,2
850-0400-061 	855-0400-061	M8	105	60	8	4	11,2
850-0500-030	855-0500-030	M8	80	30	8	5	17,5
850-0500-060	855-0500-060	M8	110	60	8	5	17,5
850-0500-080	855-0500-080	M8	130	80	8	5	17,5
850-0600-030	855-0600-030	M10	90	30	10	6	25,2
850-0600-060	855-0600-060	M10	120	60	10	6	25,2
850-0600-080	855-0600-080	M10	140	80	10	6	25,2
850-0800-080	855-0800-080	M12	170	80	13	8	49,4
850-0800-120	855-0800-120	M12	210	120	13	8	49,4
850-1000-115	855-1000-115	M16	225	115	18	10	61,7
850-1200-130	855-1200-130	M20	245	130	20	12	83,2
850-1600-160	855-1600-160	M24	290	160	27	16	140

Werkstoff 1.4404 | kN = Bruchkraft
Material AISI 316L | kN = breaking load

Alle Angaben in Millimetern
All dimensions in millimeters