


AUSSENGEWINDE, VERSCHRAUBT\_EXTERNAL THREAD, SWAGELESS CONNECTION

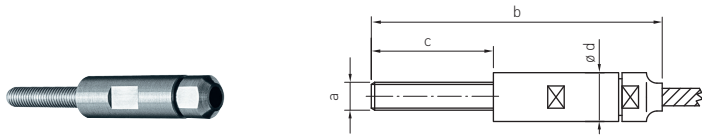

Artikelnummer Rechtsgewinde Part number RH thread	Artikelnummer Linksgewinde Part number LH thread	a	b	c	ø d	ø Seil ø rope	kN
826-0200-030*	827-0200-030	M6	85	30	13	2	2
826-0200-060*	827-0200-060	M6	115	60	13	2	2
826-0300-030*	827-0300-030	M6	85	30	13	3	4,5
826-0300-060*	827-0300-060	M6	115	60	13	3	4,5
826-0400-030*	827-0400-030	M6	85	30	13	4	8
826-0400-060*	827-0400-060	M6	115	60	13	4	8
826-0500-030*	827-0500-030	M8	87	30	15	5	12,6
826-0500-060*	827-0500-060	M8	117	60	15	5	12,6
826-0600-030*	827-0600-030	M8	87	30	15	6	18,1
826-0600-060*	827-0600-060	M8	117	60	15	6	18,1
826-0800-080	827-0800-080	M10	190	100	22	8	32,2
826-1000-100	827-1000-100	M14	250	140	30	10	46,8
826-1200-120	827-1200-120	M16	265	140	32	12	67,6

Werkstoff 1.4404 | \*Nicht geeignet für Spiralseil 1x19 | kN = Bruchkraft\_Material AISI 316L | \*Not suitable for strand 1x19 | kN = breaking load

ALLE ANGABEN IN MILLIMETERN\_ALL DIMENSIONS IN MILLIMETRES